



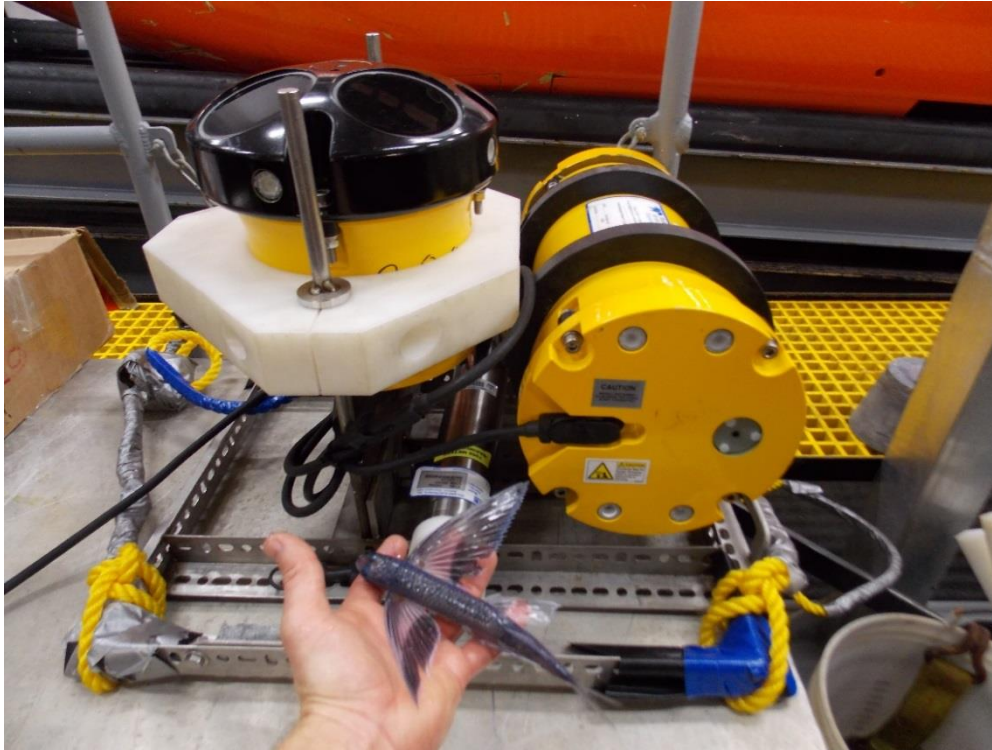

1) Fixed bottom mount with 600kHz TRDI WH Monitor ADCP, external battery case, and SBE-37 MicroCAT (salinity/temperature/pressure recorder).

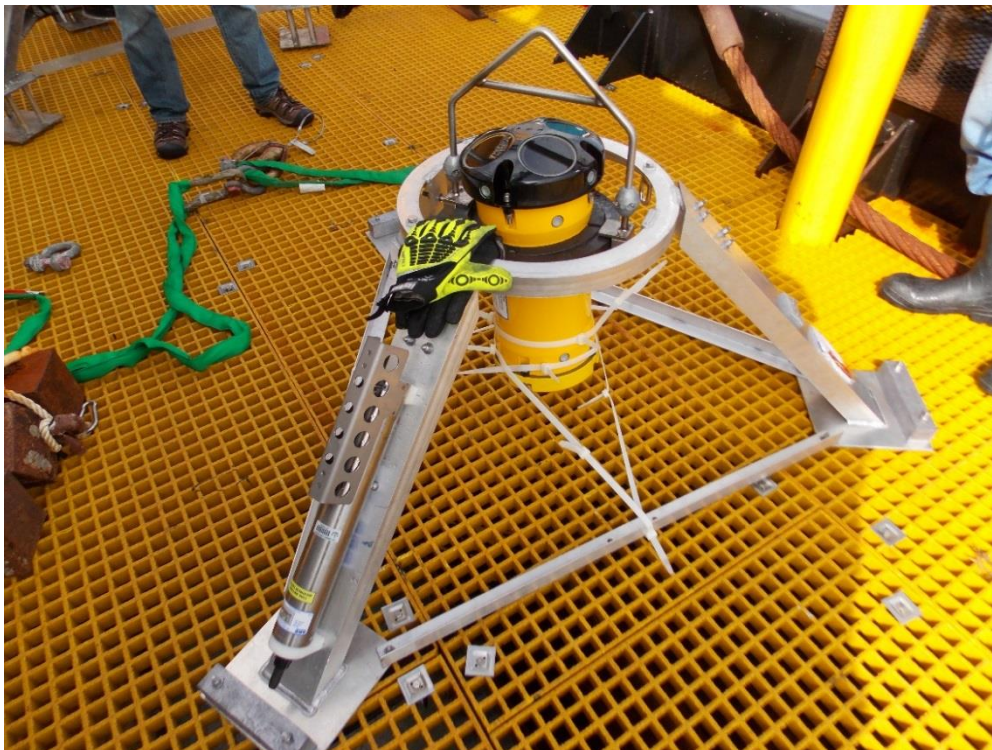

2) Gimbaled tripod with 300kHz TRDI Workhorse Sentinel ADCP and SBE-37 MicroCAT (salinity, temperature, pressure recorder).